

KOMFORT EC D5B180-E S14

Heat and energy recovery air handling units

Features

- Air handling units for efficient supply and exhaust ventilation in flats, houses, cottages and other buildings.




Design

- The casing is made of expanded polypropylene (EPP) 9/16" - 1 3/16" thickness with high heat- and sound-insulating properties.

Fans

- High-efficient external rotor EC motors and centrifugal impellers with backward curved blades are used for air supply and exhaust.

- EC motors have the best power consumption to air flow ratio and meet the latest demands concerning energy saving and high-efficient ventilation.
- EC motors are featured with high performance, low noise level and totally controllable speed range.
- Dynamically balanced impellers.

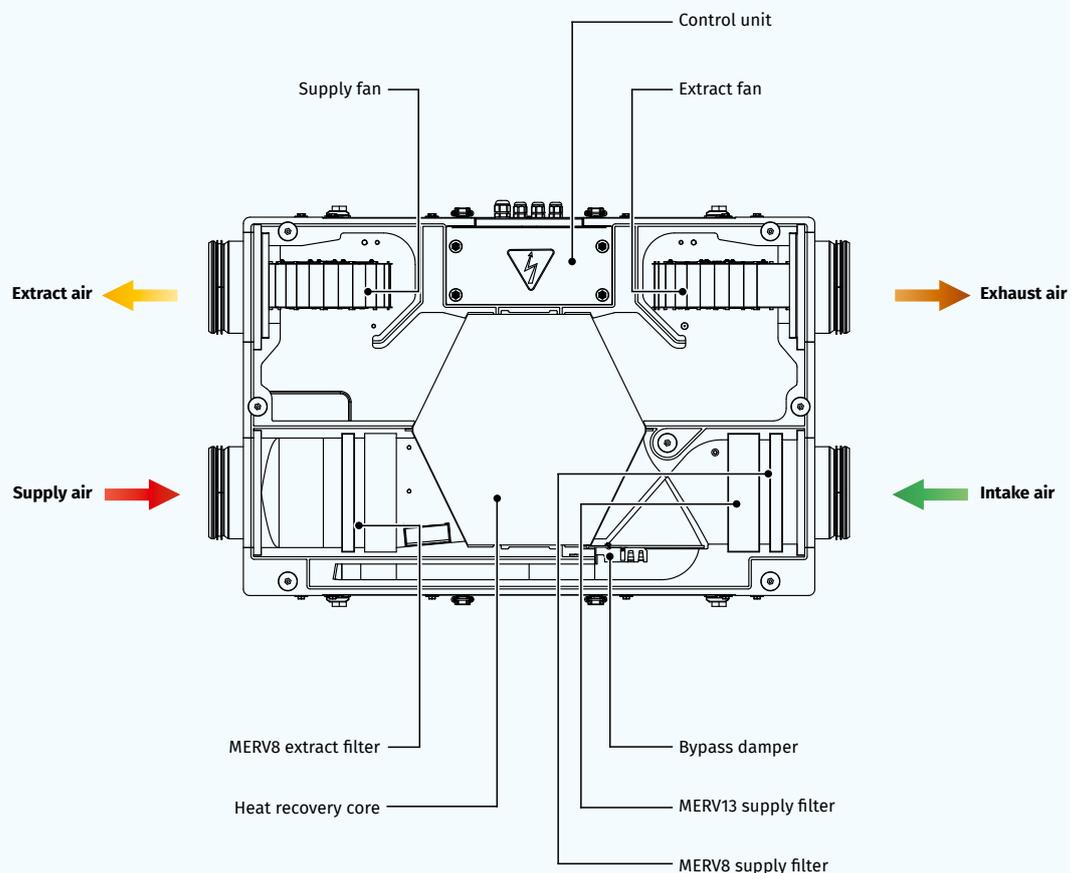

Energy recovery

- **KOMFORT EC D5B180-E S14** have a counter-flow enthalpy membrane energy recovery core. In the cold season the heat and moisture contained in the extract air are transferred to the intake air flow through the enthalpy membrane. This way the ventilation heat losses are minimized. In the warm season the heat and moisture of the outside air are absorbed by the exhaust air through the enthalpy membrane. This way the supply air is pre-cooled and dehumidified and operation load for air conditioners is reduced.




Control and automation

- **KOMFORT EC D5B180-E S14** have an integrated control panel with sensor buttons and LED indication.

Overall dimensions [in]

Model	D	B	L	L1	H
KOMFORT EC D5B180-E S14	5 15/16	23 5/8	35 7/16	39 3/4	10 3/8

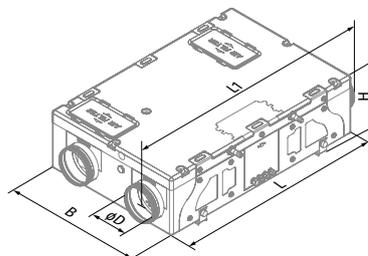

Bypass

- The **KOMFORT EC D5B180-E S14** models are equipped with a bypass which can be opened if there is a need to cool down the ventilated area with cool intake air.

Air filtration

- The built-in MERV13 and MERV8 supply filters provide efficient air filtration. The built-in MERV8 extract filter provides extract air filtration.

Mounting

- The units are designed for suspended ceiling mounting, vertical or horizontal wall mounting.
- The correct mounted unit must provide good access for servicing and filter replacement.

Technical data

Parameters	KOMFORT EC D5B180-E S14
Voltage [V/50-60 Hz]	1~ 120
Power [W]	87
Current [A]	0,71
Maximum air flow [CFM]	220
RPM [min ⁻¹]	2200
Sound pressure level at 10 ft [dBA]	33
Transported air temperature [°F]	-13...+140
Casing material	EPP
Insulation	9/16" - 1 3/16", EPP
Extract filter	MERV8
Supply filter	MERV8, MERV13
Connected air duct diameter [in]	5 15/16
Weight [lb]	30.9
Heat recovery efficiency [%]	79-94
Energy recovery core type	counter-flow
Energy recovery core material	enthalpy membrane
SEC class for S14 automation	A+
ErP	2016, 2018

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by: